

Humanoid robot balance control system during backward walking using linear quadratic regulator

Muhammad Arsyi, Andi Dharmawan, Bakhtiar Alldino Ardi Sumbodo, Muhammad Auzan,
Jazi Eko Istiyanto, Oskar Natan

Department of Computer Science and Electronics, Faculty of Mathematics and Natural Sciences, Universitas Gadjah Mada, Yogyakarta, Indonesia

Article Info

Article history:

Received May 3, 2025

Revised Jul 24, 2025

Accepted Aug 26, 2025

Keywords:

Backward walking

Humanoid robot

Innovation Sustainable

Development Goal

Inverse kinematics

Linear quadratic regulator

Support polygon

ABSTRACT

Humanoid robots are designed to replicate human activities, including tasks in hazardous environments. However, maintaining balance during backward walking remains a significant challenge due to center of mass (CoM) shifts beyond the support polygon and limited knee joint motion. This study proposes a control strategy that integrates a linear quadratic regulator (LQR) with optimized walking patterns to enhance dynamic stability. The approach combines LQR-based control with CoM trajectory planning to ensure safe and stable backward walking. The methodology includes inverse kinematics for generating walking patterns and the use of Inertial Measurement Unit (IMU) sensors to estimate the CoM trajectory. LQR parameters were tuned through simulation to improve responsiveness to disturbances. Evaluation metrics focused on CoM deviation, rise time, settling time, and overshoot. Experimental results demonstrate that the proposed LQR system effectively maintains the CoM within 5% of the support polygon boundary. The system achieved rise times under one second and settling times below two seconds, while minimizing pitch and roll overshoots. Compared to proportional control, the proposed method significantly improves stability and reduces the risk of falling. This research advances control strategies for humanoid robots, contributing to improved mobility and operational safety. Moreover, it supports Sustainable Development Goal (SDG) 9 by promoting innovation in intelligent robotic systems that can assist in complex or high-risk environments.

This is an open access article under the [CC BY-SA](#) license.



Corresponding Author:

Andi Dharmawan

Department of Computer Science and Electronics, Faculty of Mathematics and Natural Sciences,

Universitas Gadjah Mada

Yogyakarta, Indonesia

Email: andi_dharmawan@ugm.ac.id

1. INTRODUCTION

Humanoid robots are designed to emulate human abilities, including walking, lifting, and performing tasks in complex environments [1]. They are increasingly utilized in a wide range of applications, such as supporting industrial automation, healthcare services, and assisting in daily human tasks [2]. These robots offer significant advantages due to their human-like structure, which allows them to navigate environments built for humans [3]. However, ensuring dynamic stability during maneuvers like backward walking remains a critical challenge [4]. Issues such as the shift of the center of mass (CoM) beyond the support polygon and the limited range of motion in knee joints lead to frequent instability, increasing the risk of falls and limiting their usability in real-world scenarios [5].

Although much research has explored humanoid robot locomotion, it has mainly focused on forward walking and static balance [6], [7]. Existing controllers such as proportional-integral-derivative (PID) [8], fuzzy logic [9], and other conventional approaches struggle with dynamic CoM adjustments required for backward walking, often lacking the precision and adaptability for maintaining stability during unpredictable movements [10], [11]. This highlights a need for control strategies tailored specifically for backward walking.

Simplified dynamic models like the linear inverted pendulum [12] offer a promising foundation due to their linearity and computational efficiency [13], though additional refinements are necessary to address the distinct biomechanics of backward motion [14]. Stability is largely determined by the Zero Moment Point (ZMP), derived from CoM projection [15], [16], and should remain within the support polygon formed by foot contact points [17], [18].

Backward walking is crucial in applications where space constraints or sudden environmental changes exist, such as in industrial or healthcare settings [19]. To improve performance in such scenarios, this study proposes a control framework combining linear quadratic regulator (LQR) with optimized walking patterns [20], [21]. LQR enables stable, rapid responses in MIMO systems [22], while inverse kinematics ensures effective CoM trajectory management.

The key contributions are i) development of an LQR-based control framework with optimized walking patterns for stable backward walking and ii) experimental validation showing superior performance compared to traditional control methods, thereby addressing critical gaps in humanoid robot balance control.

This paper is organized as follows: Section 2 reviews the problem statement and research preliminaries. Section 3 details the methodology, including system design, control strategy, and experimental setup. Section 4 presents the results and performance analysis, and Section 5 concludes with implications and directions for future research.

2. THE PROPOSED METHOD

This study addresses the underexplored problem of maintaining balance in humanoid robots during backward walking, a maneuver that is considerably more unstable than forward locomotion. The scientific question investigated is: Can the integration of optimized walking pattern generation and Linear Quadratic Regulator (LQR) control enhance stability in humanoid robots walking backward?

Backward walking introduces specific challenges that are not present in forward motion. The CoM tends to shift beyond the support polygon due to the reversed direction of movement and limited actuation range in the knee joints, increasing the risk of instability and falls [23], [24].

To overcome these issues, the proposed method combines two key strategies.

a. Walking pattern optimization

A stable walking trajectory is generated using inverse kinematics. The pattern consists of four structured phases: shifting, lifting, stepping, and planting. These phases are carefully coordinated to ensure that the robot's CoM remains within the support polygon during each step. The pattern also accounts for the unique biomechanical constraints and motion timing associated with backward walking [25]–[27].

b. Linear quadratic regulator for dynamic balance

LQR is a model-based optimal control method that computes a gain matrix to minimize a quadratic cost function. This cost reflects the trade-off between state deviations (e.g., pitch and roll angle errors) and control efforts (e.g., ankle joint torque) [28], [29]. In our application, the LQR controller is designed based on a simplified state-space model that includes i) roll angle and angular velocity and ii) pitch angle and angular velocity. Using real-time feedback from IMU sensors, the LQR continuously adjusts the ankle joint torques to maintain CoM stability, especially during transitions between the swing and stance phases. This is critical for backward walking, where visual and proprioceptive feedback is less effective, and balance relies more heavily on control robustness.

By combining the optimized walking pattern and the LQR control, the humanoid robot can respond quickly to dynamic changes and disturbances while walking backward. The control system was tuned via simulation using a linear inverted pendulum model before deployment on the actual robot. The result is a system capable of maintaining balance without falling, even when the CoM momentarily approaches the boundary of the support polygon.

Compared to proportional control, the proposed method significantly improves stability. i) CoM deviation remains within 5% of the polygon boundary. ii) Rise time is below 1 second, and settling time is below 2 seconds. iii) No falls were observed during multi-step backward walking tests. These results provide evidence that the integrated LQR and trajectory optimization method is effective for maintaining robust balance during backward walking. This work contributes a novel solution to a less-studied aspect of humanoid locomotion, with implications for safe mobility in constrained or dynamic environments.

3. METHOD

The study uses a humanoid robot with 18 DoF (12 in legs, 6 in arms), focusing on leg behavior for backward walking, where maintaining balance is challenging due to CoM shifts. CoM is estimated using forward kinematics and IMU data. A Linear Quadratic Regulator (LQR) controls ankle torques based on pitch/roll deviations and angular velocities to keep CoM on track. Inverse kinematics guides foot trajectories. System performance criteria include: CoM within 5% of the support polygon, rise time $\leq 1s$, settling time $\leq 2s$, and pitch/roll overshoot $<$ half foot length/width—ensuring stable and smooth walking.

3.1. Design of the backward walking pattern

A well-designed walking pattern is essential for humanoid robot locomotion [30]–[32]. It determines joint movements and appropriate control mechanisms. The backward walking pattern consists of four key phases, as shown in Figures 1 and 2.

- Shifting Phase: The center of mass (CoM) shifts above the support leg to ensure stability.
- Lifting Phase: The swing leg is lifted, requiring precise control to maintain balance.
- Stepping Phase: The swing leg moves backward, followed by support leg adjustments for smooth motion.
- Planting Phase: The swing leg is placed on the ground, and the CoM is readjusted to restore stability.

Figures 1 and 2 illustrate the walking pattern starting with the right and left foot, respectively. By progressing through these phases systematically, the robot maintains its CoM within the support polygon, reducing fall risk and enhancing stability during backward walking.

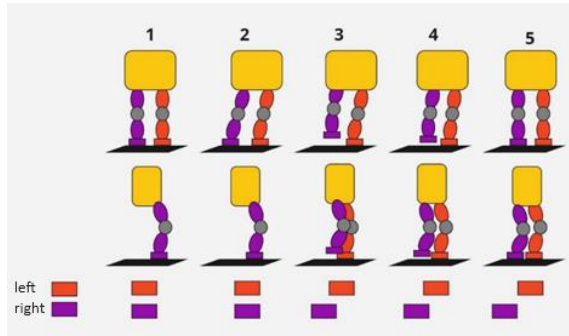


Figure 1. The design of the backward walking pattern starts with a step from the right foot.

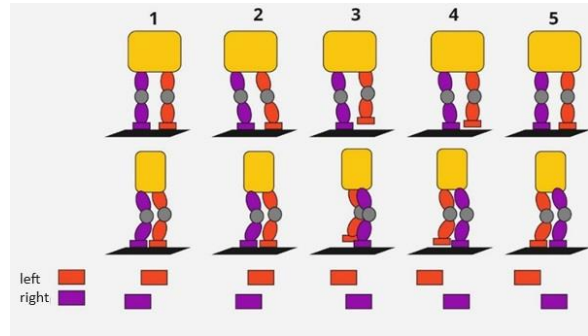


Figure 2. The design of the backward walking pattern starts with a step from the left foot.

3.2. Design of the backward walking algorithm

The walking algorithm aims to enable precise humanoid robot movement by integrating sensor setup, kinematics, walking pattern generation, and LQR control.

Footstep placement is guided by CoM and end-effector positions computed via forward and inverse kinematics. Forward kinematics, using Denavit-Hartenberg matrices, tracks CoM position and orientation, while inverse kinematics determines joint angles for desired foot positions, ensuring accurate motion and stability.

Figure 3 illustrates inverse kinematics projections on the robot's leg from both side in Figure 3(a) and front views in Figure 3(b). Inverse kinematics is used to determine the joint angles based on the final position of the end-effector [33]. To calculate the inverse kinematics of a humanoid robot's leg, trigonometric calculations are required. Equations (1) to (5) are the projected calculation for the inverse kinematics of a humanoid robot's leg as shown in Figure 3. Based on Figure 3, the angles to be determined are the hip angles of the robot (θ_1 and θ_4), the knee angle (θ_2), and the ankle angles (θ_3 and θ_5).

To find θ_1 , it can be derived from (5).

$$Z_2 = Z - L_1 - L_4 \quad (1)$$

$$L_a = \sqrt{Z_2^2 + X^2} \quad (2)$$

$$\theta_j = \cos^{-1} \left(\frac{L_2^2 + L_a^2 - L_3^2}{2 L_1 L_2} \right) \quad (3)$$

$$\theta_k = \cos^{-1} \left(\frac{Z_2}{L_a} \right) \quad (4)$$

$$\theta_1 = \theta_j + \theta_k \quad (5)$$

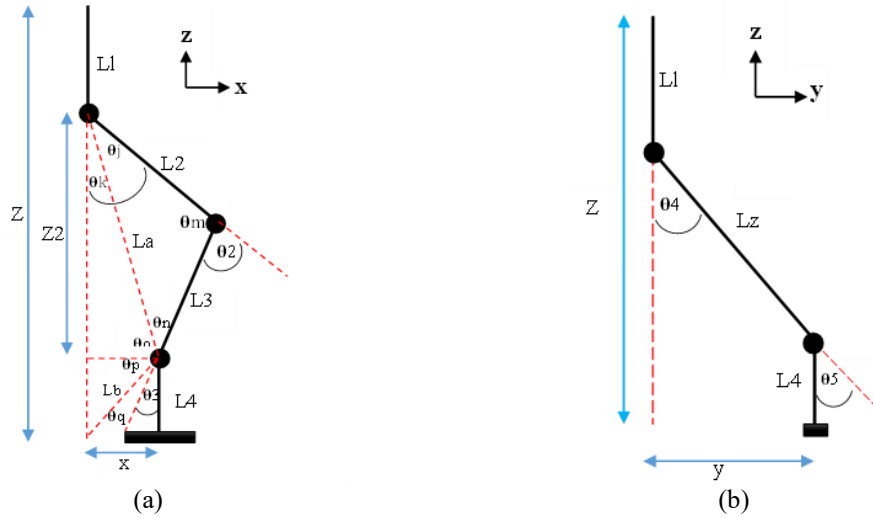


Figure 3. Projections of inverse kinematics on the humanoid robot's leg: (a) side view of the robot and (b) front view of the robot.

To find θ_2 , it can be derived from (7).

$$\theta_m = \cos^{-1} \left(\frac{L_2^2 + L_3^2 - L_a^2}{2 L_2 L_3} \right) \quad (6)$$

$$\theta_2 = 180^\circ - \theta_m \quad (7)$$

The pitch angle at the ankle forms the angle θ_3 , which is obtained using (12).

$$L_b = \sqrt{x^2 + L_4^2} \quad (8)$$

$$\theta_o = \cos^{-1} \left(\frac{x}{L_a} \right) \quad (9)$$

$$\theta_p = \sin^{-1} \left(\frac{L_4}{L_b} \right) \quad (10)$$

$$\theta_q = 180^\circ - \theta_n - \theta_o - \theta_p \quad (11)$$

$$\theta_3 = 90^\circ - \theta_p - \theta_q \quad (12)$$

To find θ_4 , it is derived from (14).

$$L_z = L_a \quad (13)$$

$$\theta_4 = \sin^{-1} \left(\frac{y}{L_z} \right) \quad (14)$$

To find θ_5 , it is derived from (16).

$$\theta_a = \cos^{-1}\left(\frac{y}{L_z}\right) \quad (15)$$

$$\theta_5 = 180^\circ - 90^\circ - \theta_a \quad (16)$$

After the foot contacts the ground and becomes the support leg, the double support phase begins. To maintain balance, the IMU sensor is configured and calibrated to function optimally. Forward kinematics uses servo angle feedback to calculate the robot's center of mass (CoM) position. Combined with IMU sensor data, it helps determine the robot's tilt and ensures the CoM remains within the support polygon to prevent falls. Meanwhile, inverse kinematics is applied to implement the walking pattern and coordinate CoM shifts during backward walking.

3.3. Design of the backward walking balance control system

This study focuses on the development of a control system aimed at reducing the robot's body imbalance and achieving low error values. In this research, states are used as the fundamental reference for control parameters. These four states form the basis for controlling the robot and minimizing the difference between the desired position and the robot's actual position: roll angle (ϕ), pitch angle (θ), roll angular velocity ($\dot{\phi}$), and pitch angular velocity ($\dot{\theta}$).

$$\begin{bmatrix} \dot{\theta} \\ \ddot{\theta} \\ \dot{\phi} \\ \ddot{\phi} \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 & 0 \\ \frac{mgl}{I_{xx}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & \frac{mgl}{I_{yy}} & 0 \end{bmatrix} \begin{bmatrix} \theta \\ \dot{\theta} \\ \phi \\ \dot{\phi} \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ \frac{1}{I_{xx}} & 0 \\ 0 & 0 \\ 0 & \frac{1}{I_{yy}} \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \end{bmatrix}, \begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \theta \\ \dot{\theta} \\ \phi \\ \dot{\phi} \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \end{bmatrix} \quad (17)$$

$\dot{\mathbf{x}} \quad \mathbf{A} \quad \mathbf{x} \quad \mathbf{B} \quad \mathbf{u} \quad \mathbf{y} \quad \mathbf{C} \quad \mathbf{x} \quad \mathbf{D} \quad \mathbf{u}$

where

θ	= Pitch angle	I_{xx}	= Moment of inertia on the x-axis
$\dot{\theta}$	= Pitch angular velocity	I_{yy}	= Moment of inertia on the y-axis
$\ddot{\theta}$	= Pitch angular acceleration	g	= Gravitational force of the Earth
ϕ	= Roll angle	y_1	= Pitch output
$\dot{\phi}$	= Roll angular velocity	y_2	= Roll output
$\ddot{\phi}$	= Roll angular acceleration	M	= Total mass of the robot
u_1	= Pitch action	l	= Distance from the center of mass to the foot sole
u_2	= Roll action		

Moment of inertia refers to an object's tendency to maintain its position against rotational motion. In this study, only movements on the x and y axes are controlled, so the moment of inertia on the z -axis is ignored. To obtain the moment of inertia values for the robot parts, robot design can be used in Autodesk Inventor software. Subsequently, (18) can be used to calculate the moment of inertia on the x and y axes of the robot.

$$I_{xx} = \sum_{j=1}^n \left(I_{G_{xxj}} + m_j(y_j^2 + z_j^2) \right), \quad I_{yy} = \sum_{j=1}^n \left(I_{G_{yyj}} + m_j(x_j^2 + z_j^2) \right) \quad (18)$$

In (18), $I_{G_{xxj}}$ dan $I_{G_{yyj}}$ are the moments of inertia on the x and y axes located at the center of mass of each robot part; x_j and y_j are the distances from the center of mass of each robot component to the foot support point on the x and y axes, respectively, and m_j is the mass of each robot component.

Simulations play a vital role in robot control system development by minimizing risks before real-world implementation. Direct testing without simulation may lead to system damage due to unmeasurable errors and lack of control over real-time behavior. Therefore, simulation is essential for validating the control system design.

In this study, the LQR control system is simulated using Python, where \mathbf{Q} and \mathbf{R} matrices are varied to determine the optimal gain \mathbf{K} [34], [35]. This gain is applied to a two-dimensional linear inverted pendulum model. The optimal gain \mathbf{K} is then implemented in the actual robot to ensure accurate and stable walking control. The block diagram of the proposed control system is shown in Figure 4.

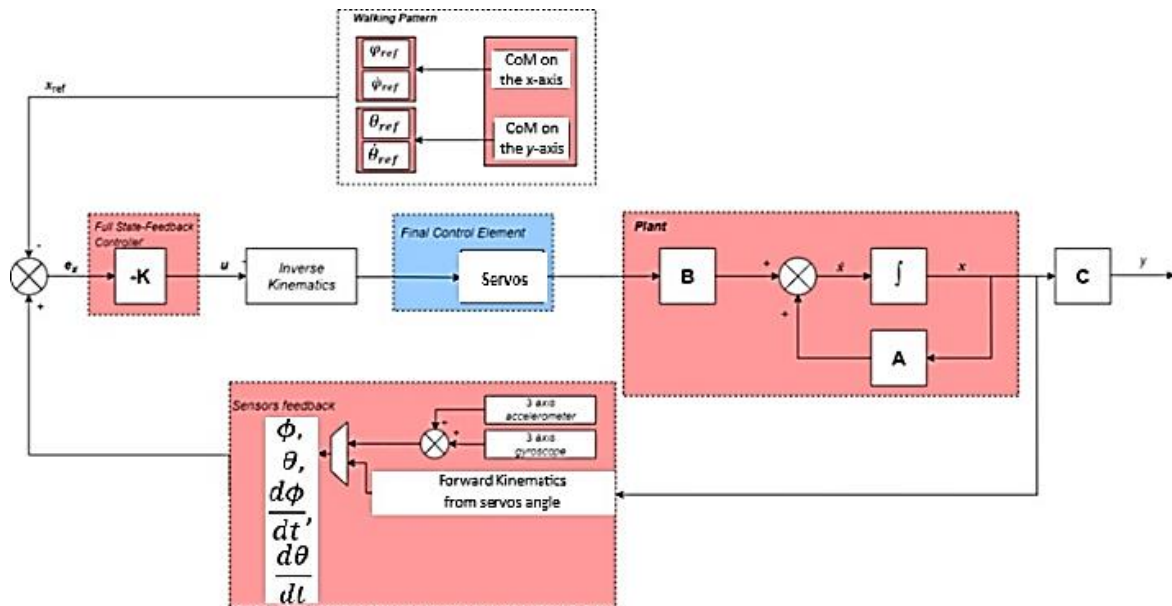


Figure 4. The block diagram of the control system.


4. RESULTS AND DISCUSSION

The study evaluated the robot's backward walking stability by testing its walking algorithm and control system. IMU sensors and forward kinematics were used to track CoM, while inverse kinematics ensured correct joint movement. Mechanical limitations affected stability during leg lifting and stepping phases. Without LQR, the robot frequently fell. With LQR, tuned using a linear inverted pendulum model, ankle adjustments improved pitch/roll control, maintaining balance and keeping the CoM within a safe range.

4.1. Backward walking robot using proportional control method

The testing begins with the robot in an upright position, feet parallel. It then performs backward steps following the designed pattern: the left footsteps first, supported by the right foot, followed by the right foot stepping back while the left supports. This sequence continues for six steps, each phase lasting 2 seconds.

The motion pattern includes a double support phase, where the robot balances before shifting its CoM. Tests were conducted to determine the optimal duration for this phase to enhance stability before stepping. Initially, proportional control was used without stabilizing mechanisms. The robot failed to complete the backward walking task without falling, as the CoM exceeded the support polygon boundaries. CoM data on the x - and y -axes was analyzed to assess stability. As shown in Figure 5, several CoM positions during the first step fell outside the support polygon, though the robot remained upright. In the second step, the robot-maintained stability. However, in the third step, the CoM dropped to zero, indicating a fall and sensor shutdown. This test highlights the importance of CoM monitoring and control for maintaining balance during backward walking.

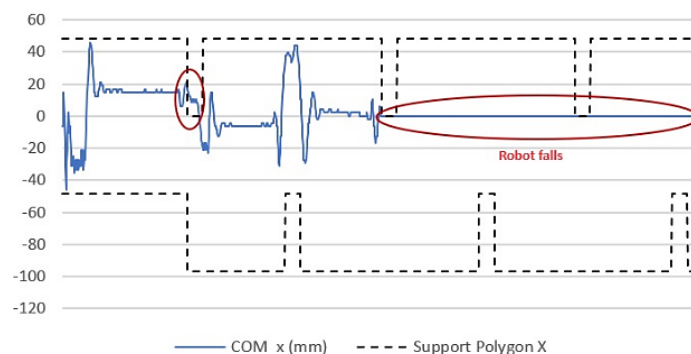Figure 5. Backward walking test on the x -axis using proportional control

Next is the backward walking test on the y -axis using proportional control that is shown in Figure 6. In this figure, the lower bound of the support polygon represents the right side of the robot's body, while the upper bound represents the left side. Based on the test result graph, there are still CoM position points on the y -axis that fall outside the support polygon area.

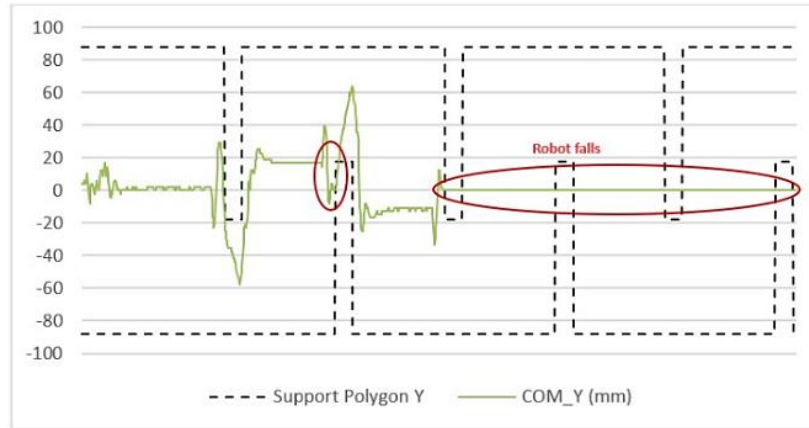


Figure 6. Backward walking test on the y -axis using proportional control

As seen in Figure 5 and Figure 6, the balance and stability of the robot while walking backward are inadequate, making it prone to falling. This condition is due to the current use of a conventional proportional control system, which is not rigid and optimal enough to maintain the stability of the humanoid robot when walking backward. The potential for falling is higher when walking backward because the primary support on the foot sole is only at the heel.

4.2 Backward walking robot using LQR control method

The next test uses the LQR method. Inverse kinematics is used to plan the end-effector's path, while LQR ensures the actuators, particularly the ankle servos, follow that path precisely and efficiently. The optimal gain K is determined by tuning the Q matrix and observing how closely the robot's CoM follows the reference trajectory. Smaller deviations indicate better system response.

Test results are shown in Figure 7 (x -axis) and Figure 8 (y -axis). The robot successfully performed backward walking without falling—unlike in the proportional control test—since no CoM value dropped to zero. On the x -axis, some CoM points in the fourth step exceed the support polygon, but the robot regains balance through passive control. On the y -axis, all CoM positions remain within bounds. Overall, applying LQR leads to a clear improvement in balance and stability during backward walking.

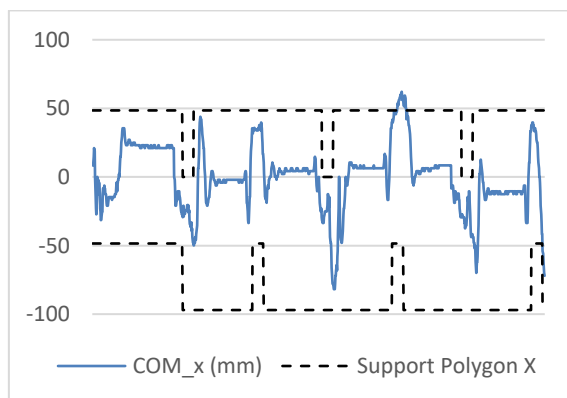


Figure 7. Backward walking test graph on the x -axis using LQR

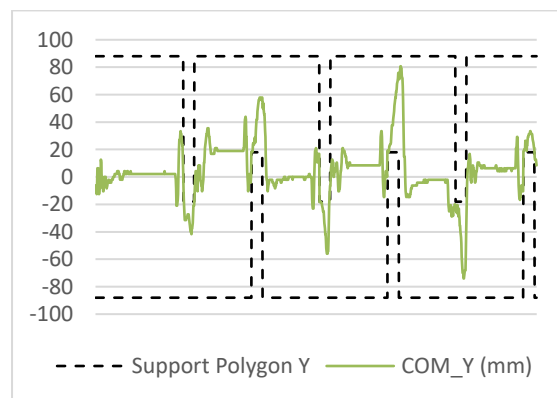


Figure 8. Backward walking test graph on the y -axis using LQR

5. CONCLUSION

This study successfully demonstrates that the humanoid robot can walk backward while maintaining balance and stability along both the x-axis (roll) and y-axis (pitch) using a linear quadratic regulator (LQR) control system. The robot was able to maintain its stability despite occasional deviations of the center of mass (CoM) from the support polygon area, attributed to the passive control provided by the robot's structure. The application of LQR control has been shown to significantly improve the robot's stability during backward walking, confirming the effectiveness of this approach in enhancing robotic balance and movement. This research contributes to the field of robotics by providing a reliable control method for maintaining stability in humanoid robots during complex movements.

ACKNOWLEDGMENTS

The authors would like to express their gratitude to the Department of Computer Science and Electronics at Universitas Gadjah Mada for providing the necessary resources and support to conduct this research. We are also grateful to our colleagues and reviewers for their valuable feedback and insights that significantly improved the quality of this work.

FUNDING INFORMATION

This research was financially supported by the Final Project Recognition grant (Rekognisi Tugas Akhir) awarded by the Directorate of Research, Universitas Gadjah Mada. The funding was provided through Decree Number 370/UN.P1/KPT/HUKOR/2024 dated May 3, 2024, and Assignment Letter Number 5286/UN1.P1/PT.01.03/2024 dated May 6, 2024.

AUTHOR CONTRIBUTIONS STATEMENT

This journal uses the Contributor Roles Taxonomy (CRediT) to recognize individual author contributions, reduce authorship disputes, and facilitate collaboration.

Name of Author	C	M	So	Va	Fo	I	R	D	O	E	Vi	Su	P	Fu
Muhammad Arsyi	✓	✓	✓	✓	✓	✓			✓	✓				✓
Andi Dharmawan		✓				✓			✓	✓	✓	✓		✓
Bakhtiar Alldino Ardi Sumbodo	✓		✓	✓		✓			✓		✓			✓
Muhammad Auzan		✓	✓			✓	✓			✓			✓	
Jazi Eko Istiyanto					✓		✓			✓		✓	✓	
Oskar Natan	✓			✓		✓		✓		✓				

- C : Conceptualization
- M : Methodology
- So : Software
- Va : Validation
- Fo : Formal analysis
- I : Investigation
- R : Resources
- D : Data Curation
- O : Writing - Original Draft
- E : Writing - Review & Editing
- Vi : Visualization
- Su : Supervision
- P : Project administration
- Fu : Funding acquisition

CONFLICT OF INTEREST STATEMENT

Authors state no conflict of interest.

DATA AVAILABILITY

The data that support this review paper is available from the references cited in the manuscript.

REFERENCES

[1] C. R. de Lima, S. G. Khan, M. Tufail, S. H. Shah, and M. R. O. A. Maximo, "Humanoid robot motion planning approaches: a survey," *Journal of Intelligent & Robotic Systems*, vol. 110, no. 2, p. 86, Jun. 2024, doi: 10.1007/s10846-024-02117-z.

[2] I. Radosavovic, T. Xiao, B. Zhang, T. Darrell, J. Malik, and K. Sreenath, "Real-world humanoid locomotion with reinforcement learning," *Science Robotics*, vol. 9, no. 89, Apr. 2024, doi: 10.1126/scirobotics.adi9579.




[3] P. Jha *et al.*, "Human-machine interaction and implementation on the upper extremities of a humanoid robot," *Discover Applied Sciences*, vol. 6, no. 4, p. 152, Mar. 2024, doi: 10.1007/s42452-024-05734-3.

[4] Q. Luo, C. Chevallereau, Y. Ou, J. Pang, V. De-León-Gómez, and Y. Aoustin, "A self-stabilised walking gait for humanoid robots based on the essential model with internal states," *IET Cyber-Systems and Robotics*, vol. 4, no. 4, pp. 283–297, Dec. 2022,




- doi: 10.1049/csy2.12071.
- [5] M. M. Kawakibi, A. Dharmawan, J. E. Istiyanto, M. Auzan, and D. Lelono, "Stability control of humanoid robot walking speed using linear quadratic regulator method," *ICIC Express Letters, Part B: Applications*, vol. 15, no. 11, pp. 1107–1115, 2025, doi: 10.24507/iceiclb.15.11.1107.
 - [6] A. Dharmawan, J. E. Istiyanto, A. E. Putra, and M. Auzan, "LQR compensated by fuzzy for kicking balance control of a humanoid robot," *ICIC Express Letters, Part B: Applications*, vol. 14, no. 5, pp. 449–456, 2023, doi: 10.24507/iceiclb.14.05.449.
 - [7] A. Esposito, M. Cuciniello, T. Amorese, A. Vinciarelli, and G. Cordasco, "Humanoid and android robots in the imaginary of adolescents, young adults and seniors," *Journal of Ambient Intelligence and Humanized Computing*, vol. 15, no. 5, pp. 2699–2718, May 2024, doi: 10.1007/s12652-022-03806-z.
 - [8] T. Priyambodo and A. Dharmawan, "Auto vertical takeoff and landing on quadrotor using PID-fuzzy," *Journal of Engineering and Applied Sciences*, vol. 12, no. Specialissue3, pp. 6420–6425, 2017, doi: 10.3923/jeasci.2017.6420.6425.
 - [9] S. N. Izzah, A. Dharmawan, M. Auzan, B. A. A. Sumbodo, and J. E. Istiyanto, "Stabilizing quadruped robot movement using fuzzy logic control for yaw angle adjustment in walking and trotting gait," *Indonesian Journal of Electrical Engineering and Informatics (IJEET)*, vol. 12, no. 4, Dec. 2024, doi: 10.52549/ijeei.v12i4.5837.
 - [10] W. Zuo, J. Gao, J. Liu, T. Wu, and X. Xin, "Whole-body dynamics for humanoid robot fall protection trajectory generation with wall support," *Biomimetics*, vol. 9, no. 4, p. 245, Apr. 2024, doi: 10.3390/biomimetics9040245.
 - [11] S. Golousov *et al.*, "Humanoid robot solving a task of balancing on a tilting platform," *Cybernetics and Physics*, no. Volume 9, 2020, Number 1, pp. 5–12, Jun. 2020, doi: 10.35470/2226-4116-2020-9-1-5-12.
 - [12] V. Kurtz, R. R. da Silva, P. M. Wensing, and H. Lin, "Formal connections between template and anchor models via approximate simulation," in *2019 IEEE-RAS 19th International Conference on Humanoid Robots (Humanoids)*, Oct. 2019, pp. 64–71. doi: 10.1109/Humanoids43949.2019.9035022.
 - [13] Y. Chen, "Walking problem of bipedal humanoid robot: comparison between model-based and learning-based method," in *2023 IEEE 3rd International Conference on Power, Electronics and Computer Applications (ICPECA)*, Jan. 2023, pp. 1629–1633. doi: 10.1109/ICPECA56706.2023.10075792.
 - [14] M. Zafar, S. Hutchinson, and E. A. Theodorou, "Hierarchical optimization for whole-body control of wheeled inverted pendulum humanoids," in *2019 International Conference on Robotics and Automation (ICRA)*, May 2019, pp. 7535–7542. doi: 10.1109/ICRA.2019.8794360.
 - [15] P. Dastango and A. Ramirez-Serrano, "Non-linear parameter identification for humanoid robot components," Nov. 2020. doi: 10.11159/cdsr20.148.
 - [16] C. Tao, J. Xue, Z. Zhang, F. Cao, C. Li, and H. Gao, "Gait optimization method for humanoid robots based on parallel comprehensive learning particle swarm optimizer algorithm," *Frontiers in Neurorobotics*, vol. 14, Jan. 2021, doi: 10.3389/fnbot.2020.600885.
 - [17] A. Dharmawan, C. Habiba, and M. Auzan, "Walking stability control system on humanoid when turning based on LQR method," *International Journal of Scientific & Technology Research*, vol. 8, no. 11, pp. 2606–2611, 2019.
 - [18] J. P. Kolhe, S. Soumya, and S. E. Talole, "Disturbance estimation based robust center of mass tracking control of humanoid robot," *IFAC-PapersOnLine*, vol. 57, pp. 315–320, 2024, doi: 10.1016/j.ifacol.2024.05.054.
 - [19] M. Auzan, D. Lelono, and A. Dharmawan, "Humanoid walking control using LQR and ANFIS," *Journal of Robotics and Control (JRC)*, vol. 4, no. 4, pp. 548–556, Aug. 2023, doi: 10.18196/jrc.v4i4.16444.
 - [20] S. J. Chacko, N. P. C., and R. J. Abraham, "Optimizing LQR controllers: A comparative study," *Results in Control and Optimization*, vol. 14, p. 100387, Mar. 2024, doi: 10.1016/j.rico.2024.100387.
 - [21] F. Bonsignorio and E. Zereik, "Belief space planning for robust humanoid locomotion," *IFAC-PapersOnLine*, vol. 56, no. 2, pp. 9765–9770, 2023, doi: 10.1016/j.ifacol.2023.10.292.
 - [22] A. Dharmawan, A. Ashari, A. G. Aprilia, and A. M. Handayani, "Auto VTOL system on quadrotor using Madgwick quaternion Kalman filter and LQR," in *2018 4th International Conference on Science and Technology (ICST)*, Aug. 2018, pp. 1–6. doi: 10.1109/ICSTC.2018.8528613.
 - [23] M. A. Basthomi *et al.*, "Walking balance control for humanoid soccer robot on synthetic grass," in *2020 International Electronics Symposium (IES)*, Sep. 2020, pp. 213–218. doi: 10.1109/IES50839.2020.9231879.
 - [24] Y. Zhou and L. Chen, "The path trajectory planning of swinging legs for humanoid robot," in *IECON 2020 The 46th Annual Conference of the IEEE Industrial Electronics Society*, Oct. 2020, pp. 384–389. doi: 10.1109/IECON43393.2020.9254415.
 - [25] P. Mishra *et al.*, "Footstep planning of humanoid robot in ROS environment using Generative Adversarial Networks (GANs) deep learning," *Robotics and Autonomous Systems*, vol. 158, p. 104269, Dec. 2022, doi: 10.1016/j.robot.2022.104269.
 - [26] M. Farhat, Y. Kali, M. Saad, M. H. Rahman, and R. E. Lopez-Herrejon, "Walking position commanded NAO robot using nonlinear disturbance observer-based fixed-time terminal sliding mode," *ISA Transactions*, vol. 146, pp. 592–602, Mar. 2024, doi: 10.1016/j.isatra.2023.12.026.
 - [27] Vikas, D. R. Parhi, and A. K. Kashyap, "Humanoid robot path planning using memory-based gravity search algorithm and enhanced differential evolution approach in a complex environment," *Expert Systems with Applications*, vol. 215, p. 119423, Apr. 2023, doi: 10.1016/j.eswa.2022.119423.
 - [28] P. Li, B. Yin, L. Zhang, and Y. Zhao, "Adaptive control algorithm for quadruped robots in unknown high-slope terrain," *Journal of Engineering Research*, May 2024, doi: 10.1016/j.jer.2024.05.018.
 - [29] C. Zhang, W. Zou, L. Ma, and Z. Wang, "Biologically inspired jumping robots: A comprehensive review," *Robotics and Autonomous Systems*, vol. 124, p. 103362, Feb. 2020, doi: 10.1016/j.robot.2019.103362.
 - [30] R. Zhang, Z. Yu, X. Chen, and Q. Huang, "Motion transition under urgent change of target step-stone during three-dimensional biped walking," *Journal of Intelligent & Robotic Systems*, vol. 110, no. 1, p. 16, Mar. 2024, doi: 10.1007/s10846-024-02053-y.
 - [31] R. Fazel, A. M. Shafei, and S. R. Nekoo, "A new method for finding the proper initial conditions in passive locomotion of bipedal robotic systems," *Communications in Nonlinear Science and Numerical Simulation*, vol. 130, p. 107693, Mar. 2024, doi: 10.1016/j.cnsns.2023.107693.
 - [32] H. Taheri and C. X. Zhao, "Omnidirectional mobile robots, mechanisms and navigation approaches," *Mechanism and Machine Theory*, vol. 153, p. 103958, Nov. 2020, doi: 10.1016/j.mechmachtheory.2020.103958.
 - [33] İ. H. Şanlıtürk and H. Kocabaş, "Precise calculation of inverse kinematics of the center of gravity for bipedal walking robots," *Applied Sciences*, vol. 14, no. 9, p. 3706, Apr. 2024, doi: 10.3390/app14093706.
 - [34] H. Li, C. Wang, Z. Yin, J. Xi, and Y. Zheng, "Optimal distributed time-varying formation control for second-order multiagent systems: LQR-based method," *ISA Transactions*, vol. 152, pp. 177–190, Sep. 2024, doi: 10.1016/j.isatra.2024.06.016.
 - [35] A. S. Belyaev and O. Y. Sumenkov, "Hybrid control algorithm based on LQR and genetic algorithm for active support weight compensation system," *IFAC-PapersOnLine*, vol. 54, no. 13, pp. 431–436, 2021, doi: 10.1016/j.ifacol.2021.10.486.

BIOGRAPHIES OF AUTHORS






Muhammad Arsyi    was born in Sleman on March 19, 2002. He earned his Bachelor of Science (B.Sc.) degree in Electronics and Instrumentation from Universitas Gadjah Mada, Indonesia, where he specialized in Robotics and Embedded Systems. Throughout his academic journey, Arsyi was an active member of the university's prestigious Robotics Team at Universitas Gadjah Mada, focusing on the development of humanoid dance robots. His role primarily involved hardware programming and control system integration to enhance the precision and fluidity of the robot's movements. His dedication and expertise contributed to the team's achievements in national robotics competitions. Arsyi concentrated on the balance control of humanoid robots, developing an advanced algorithm to improve stability during motion. His work demonstrated a deep understanding of control systems, embedded programming, and robotic dynamics. He can be contacted at muhammadarsyi14@mail.ugm.ac.id.






Andi Dharmawan    was born in Surakarta, Indonesia, in 1984. He received his B.Sc. in Electronics and Instrumentation in 2006, M.Sc. in Computer Science in 2009, and Ph.D. in Computer Science in 2017, all from Universitas Gadjah Mada, Indonesia. From 2007 to 2009, he worked as a Research Assistant at the Department of Computer Science and Electronics, Universitas Gadjah Mada. Since 2009, he has been a faculty member at the same department, where he is also a part of the Embedded Systems and Robotics Laboratory. His research interests include control systems for robotics, autonomous unmanned systems, and advanced control system development. He can be contacted at andi_dharmawan@ugm.ac.id.






Bakhtiar Alldino Ardi Sumbodo    was born in Purwokerto in 1987. He received his B.Sc. degree in Electronics and Instrumentation in 2009, and a master's degree in Computer Science in 2014 from Gadjah Mada University, Indonesia. From 2010 to 2014, he was a research assistant in the Department of Computer Science and Electronics at Gadjah Mada University, Indonesia. Since 2014, he has been a lecturer in the Department of Computer Science and Electronics at Universitas Gadjah Mada. He is a member of the Embedded Systems and Robotics Research Lab. His research topics are related to embedded electronics, robotics, PLC, and computer networks. He can be contacted at b.alldino.as@ugm.ac.id.






Muhammad Auzan    is currently pursuing his Ph.D. at the National Taiwan University of Science and Technology, focusing on intelligent control systems, dynamic systems, and robotics. He earned his bachelor's degree in Electronics and Instrumentation in 2017 and his master's degree in Computer Science in 2020, both from the Department of Computer Science and Electronics, Universitas Gadjah Mada, Indonesia. His research interests include system dynamics, control theory, robotics, and the application of AI in control systems. He can be contacted at muhammadauzan@ugm.ac.id.



Jazi Eko Istiyanto    is currently a full professor in Electronics and Instrumentation at Universitas Gadjah Mada, Faculty of Mathematics and Natural Sciences, a position he has held since 2010, before taking office at BAPETEN (Indonesia Nuclear Energy Regulatory Agency) as the Chairman from February 2014 until October 2021. Before serving the Government of Indonesia, he held academic managerial positions as Head of the Computer Science and Electronics Department (2011-2014) and Head of the Physics Department (2007-2011), Universitas Gadjah Mada. Jazi Eko Istiyanto holds a Ph.D. (1995) in Electronic Systems Engineering, an M.Sc. (1988) in Computer Science, and a Postgraduate Diploma (1987) in Computer Programming and Microprocessors' Applications from the University of Essex, Colchester, United Kingdom, and a B.Sc. (1986) in Nuclear Physics from Universitas Gadjah Mada, Yogyakarta, Indonesia. His research interests cover embedded systems and cyber-physical systems security. He is also a registered engineer (electronic engineering) in Indonesia and the ASEAN countries. He can be contacted at jazi@ugm.ac.id.



Oskar Natan    received the B.A.Sc. degree in Electronics Engineering and the M.Eng. degree in Electrical Engineering from Politeknik Elektronika Negeri Surabaya, Indonesia, in 2017 and 2019, respectively, and the Ph.D. (Eng.) degree in Computer Science and Engineering from Toyohashi University of Technology, Japan, in 2023. Since January 2020, he has been affiliated with the Department of Computer Science and Electronics, Universitas Gadjah Mada, Indonesia, first as a Lecturer and currently as an assistant professor. His research interests include sensor fusion, hardware acceleration, and end-to-end systems. He is a member of the IEEE ITS Society, the IEEE-RA Society, and the Indonesian Computer, Electronics, and Instrumentation Support Society (IndoCEISS). He has been serving as a Reviewer for some reputable journals and conferences, including IEEE Transactions on Intelligent Vehicles, IEEE Transactions on Intelligent Transportation Systems, IEEE ICRA, and IEEE/RSJ IROS. He can be contacted at oskarnatan@ugm.ac.id.