

Real-time microreaction recognition system

Yi-Chang Wu, Yao-Cheng Liu, Ru-Yi Huang

Department Forensic Science Division, Investigation Bureau, Ministry of Justice, New Taipei City, Taiwan

Article Info

Article history:

Received Nov 29, 2022

Revised Dec 27, 2022

Accepted Jan 16, 2023

Keywords:

Deep learning

Microreaction

Real-time recognition

ABSTRACT

This study constructed a real-time microreaction recognition system that can give real-time assistance to investigators. Test results indicated that the number of frames per second (30 or 190); angle of the camera, namely the front view of the interviewee or left (+45°) or right (-45°) view; and image resolution (480 or 680 p) did not have major effects on the system's recognition ability. However, when the camera was placed at a distance of 300 cm, recognition did not always succeed. Value changes were larger when the camera was placed at an elevation 45° than when it was placed directly in front of the person being interrogated. Within a specific distance, the recognition results of the proposed real-time microreaction recognition system concurred with the six reaction case videos. In practice, only the distance and height of the camera must be adjusted in the real-time microreaction recognition system.

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.



Corresponding Author:

Yi Chang Wu

Forensic Science Division, Investigation Bureau, Ministry of Justice

No. 74, Zhonghua Rd., Xindian Dist., New Taipei City 231, Taiwan

Email: shintenwu@gmail.com

1. INTRODUCTION

The improvement of technology and popularization of big data analysis have facilitated the prevalence of video surveillance systems constructed with artificial intelligence (AI) deep learning [1]–[6], [7]–[10]. Because deep-learning methods require only a small number of samples and can complete training and validation within a short period of time, they are used in the recognition of human activities, facial expressions, and voices. In terms of their extended applications, deep-learning methods are used in research, crime prevention and alerts, medical assistance, accident alerts, and emotion recognition [11]–[17].

The main responsibility of staff at the Ministry of Justice Investigation Bureau is the investigation of major criminal cases. Inquiry is one of the important means of investigation, as is carefully listening to whether a person's statement is in agreement with the evidence. By observing the body movements of a person being interrogated, Ministry of Justice Investigation Bureau staff can evaluate the reliability of the person's statement, infer more clues, and obtain evidence. Because of the recent coronavirus disease (COVID-19) pandemic, the identification of microexpressions through use of a facial action unit (AU) has become much more difficult (or failed completely) because people being interrogated now wear a mask.

Head posture and gaze direction also play crucial roles in emotional and social signals and expression and can be used to evaluate attention, social skills, mental health, and emotional intensity [18]. People's microexpressions and body movements after they have been stimulated are clues to what is in their mind [19]. When trying to hide a certain emotion, people tend to exhibit one of eight microreactions (i.e., the freeze reaction, territory reaction, look-up reaction, combat reaction, victory reaction, escape reaction, comfort reaction, and respiratory reaction).

In this study, two microexpressions, namely head movement and line of sight [20], [21], were used in combination with speech to recognize and analyze six microreactions exhibited by people being

interrogated. The self-designed real-time microreaction recognition system was employed to provide investigators with real-time analysis results, helping them determine whether a person being interrogated was exhibiting contradictory reactions. By doing so, the investigators could discover hidden emotions and adjust the strategy and direction of the interrogation in a timely manner, thereby improving the interrogation's efficiency.

The remaining sections of this study are as: section 2 presents the methods, including how data were collected and how useful information was extracted for analysis. Section 3 presents the results and discussion. Finally, section 4 summarizes the study conclusion.

2. METHOD

Image recognition was previously limited to manual data processing and relatively slow machine learning. At present, improved hardware and AI-based deep learning can rapidly process big data to ensure high efficiency of interactive learning. Scholars have devoted themselves to optimization of single software in image recognition research [22], [23]. So far, much open-source software, which can be connected and applied in response to different needs by using simple equipment, has been developed.

Previously, the facial action coding system (FACS) was used to interpret six human emotions through microexpressions [14], [15]. In this study, a multimodal combination was used to recognize these six human microreactions. The combination was expected to result in high recognition accuracy [24]. In terms of equipment, the user needs only a camera, microphone, and computer, all of which are already available in interrogation rooms, and must simply install the self-designed simple version of the real-time microreaction recognition system. The equipment enables investigators to discover potential contradictory emotional reactions of a person being interrogated on site, adjust their strategy of interrogation, and evaluate the direction of judgment and interrogation.

The proposed real-time microreaction recognition system combines data on head movement, line of sight, and volume difference; these data are recognized using OpenFace and OpenSmile to identify six reactions as shown in Figure 1. In this study, data were collected and compiled in the system through an application programming interface, and a database was established. OpenFace and OpenSmile have the advantages of real-time recognition and modularity, which enables connection.

- OpenFace: facial recognition is the simplest method for recognizing human emotions. In addition to facial recognition/markings and a facial AU, this software can identify head posture and line of sight. A simple information transmission system can be applied and integrated with other equipment [18], [22], [25], [26].
- OpenSmile: this open-source software was developed by the Technical University of Munich in 2008. It can analyze speech and music in real time. Its capacity for expansion, which is simple and diverse, enables the software to be applied in academic research on emotion recognition and in the medical field [27]–[29].

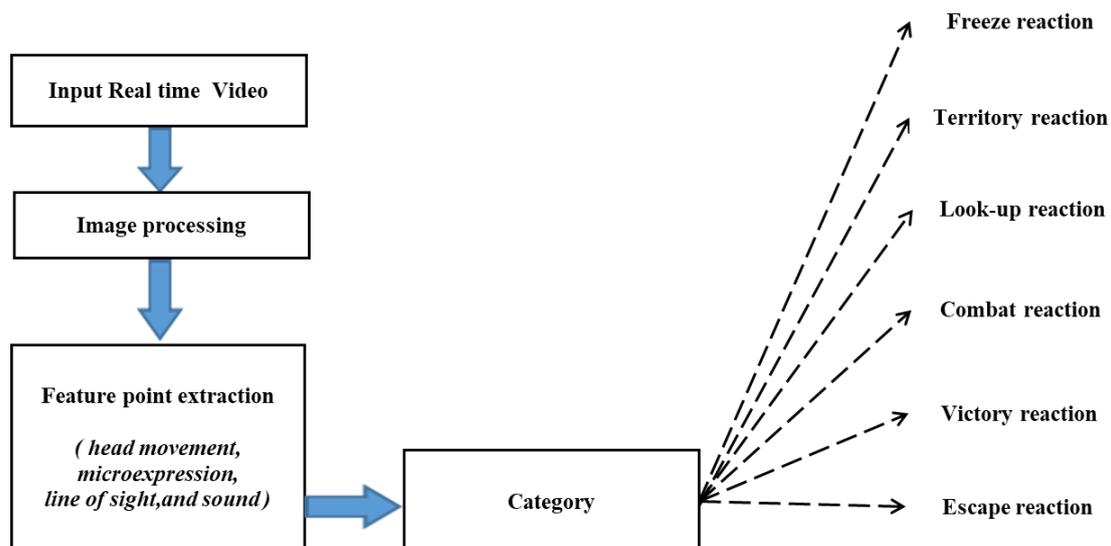


Figure 1. System flowchart

In order to obtain investigation-related information during interrogation, the interrogator must stimulate the interrogated in a timely manner, so as to find clues from the interrogated’s emotions. The process of using the Bureau’s real-time micro-reaction recognition system by the interrogators of the Investigation Bureau of this project is as shown in Figure 2:

- The interrogator appropriately stimulates the person being interrogated by asking questions or presenting evidence.
- The person being interrogated exhibits micromovements to hide their emotions.
- Because the performance of the person being interrogated is likely to have considerable consequences for them (i.e., it is a high-stakes situation), the authenticity of the micromovement is of great referential value.
- Technology assists with interpretation of the micromovements, enabling investigators to make an objective judgment on the basis of evidence.
- Upon discovering a contradictory statement, the interrogator can further stimulate the person being interrogated by asking questions or presenting evidence and then repeat the procedure.

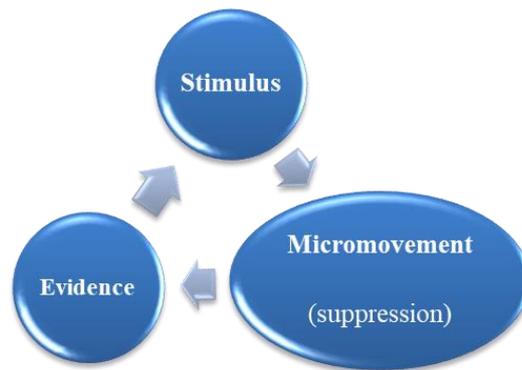


Figure 2. Interrogation process

3. RESULTS AND DISCUSSION

To obtain accurate recognition results in practice, this study employed various camera settings in its experiment: different frames per second (FPS; 30 or 190 FPS), angle [view from the front, left (+45°), or right (-45°)], elevation of camera (front or 45°), distance (30, 100, 200, or 300 cm), and resolution (480 or 680 p). Figure 3 shows the six reactions identified by the real-time microreaction recognition system; the intensity of the obtained reaction is shown on the left.





Reaction	Image	Reaction	Image
Freeze reaction		Combat reaction	
Territory reaction		Victory reaction	
Look-up reaction		Escape reaction	

Figure 3. Images of the reactions identified by the real-time microreaction recognition system

Different FPS tests freeze reaction as shown in Figure 4, territory reaction as shown in Figure 5, look-up reaction as shown in Figure 6 and combat reaction as shown in Figure 7. The results show that there is no significant difference between 30 and 190 FPS recognition. Different angles test freeze reaction as shown in Figure 8, territory reaction as shown in Figure 9, look-up reaction as shown in Figure 10 and combat reaction as shown in Figure 11. The results showed that there was no significant difference in the identification of three angles [front, left (+45°), and right (-45°)], but the GAZE left-right value was slightly higher at +45° and (-45°) than for the front setting. Different heights test freeze reaction as shown in Figure 12, territory reaction as shown in Figure 13, look-up reaction as shown in Figure 14 and combat reaction as shown in Figure 15. The results show that the GAZE Up/Down value increases significantly when the height is 45°.

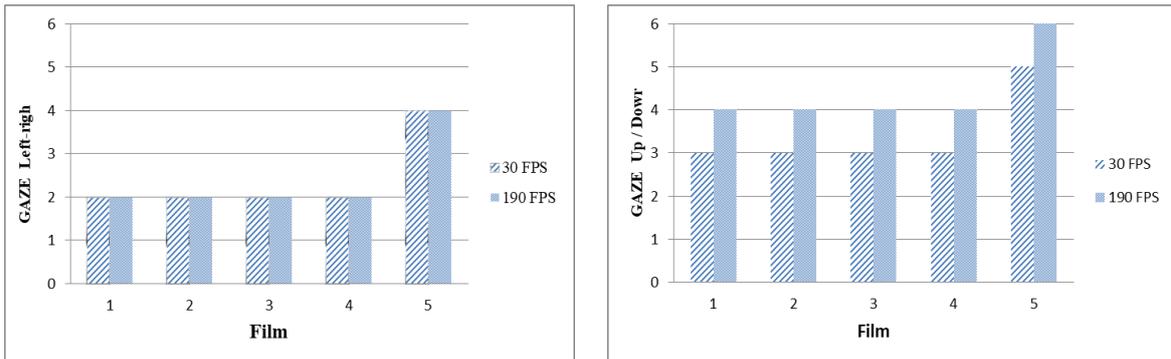


Figure 4. Freeze reaction (FPS)

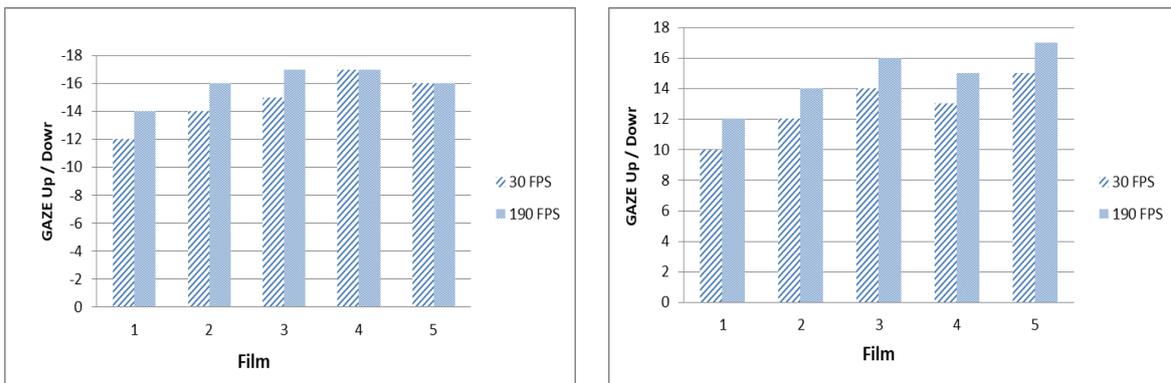


Figure 5. Territory reaction (FPS)

Figure 6. Look-up reaction (FPS)

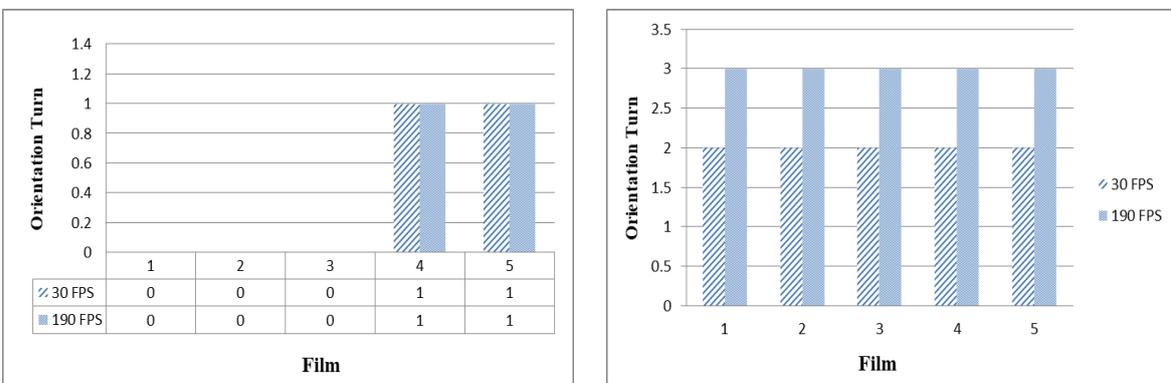


Figure 7. Combat reaction (FPS)

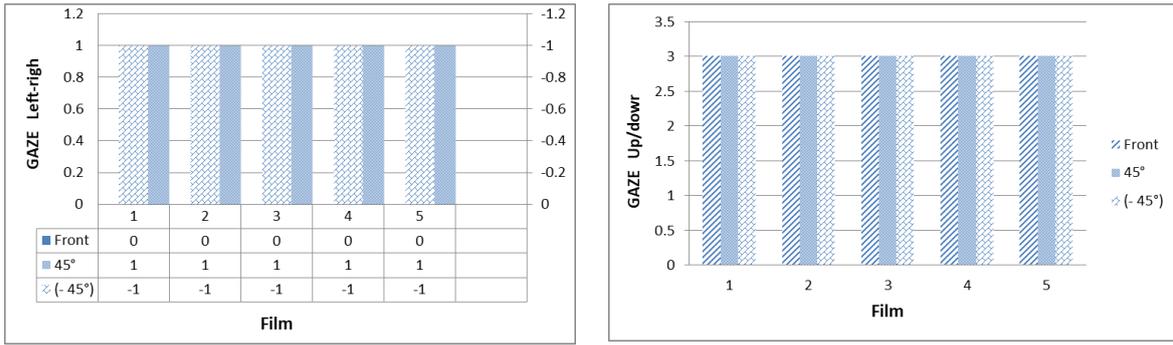


Figure 8. Freeze reaction (angles)

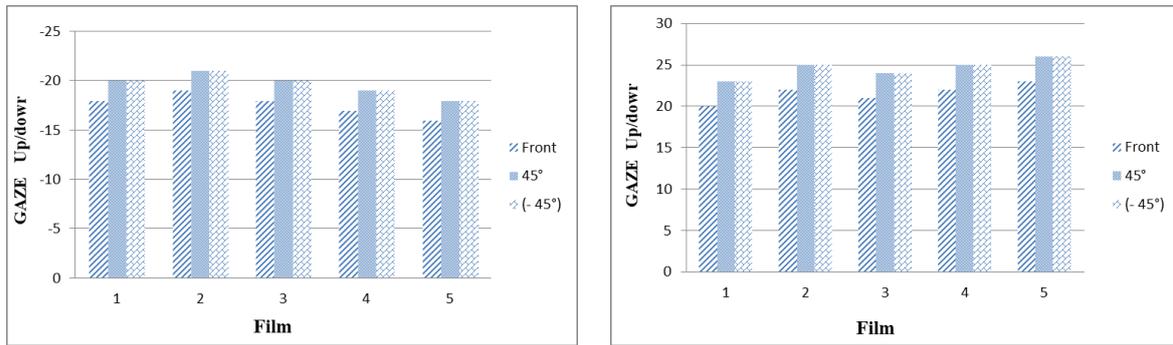


Figure 9. Freeze reaction (angles)

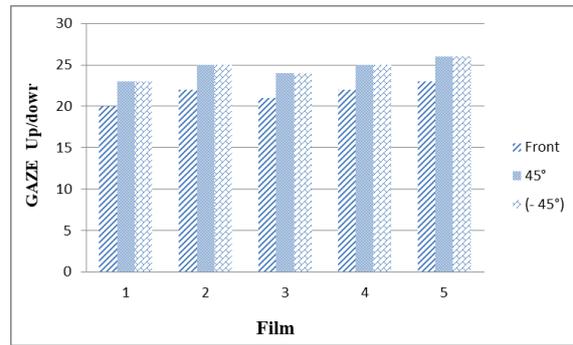


Figure 10. Look-up reaction (angles)

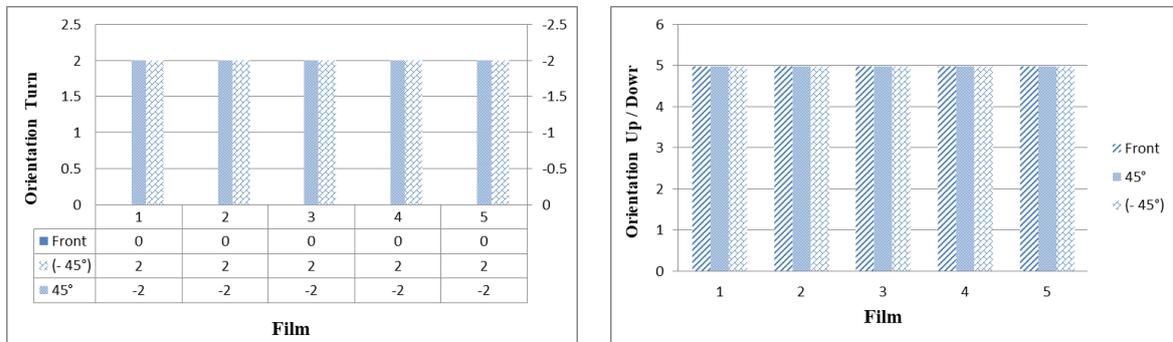


Figure 11. Combat reaction (angles)

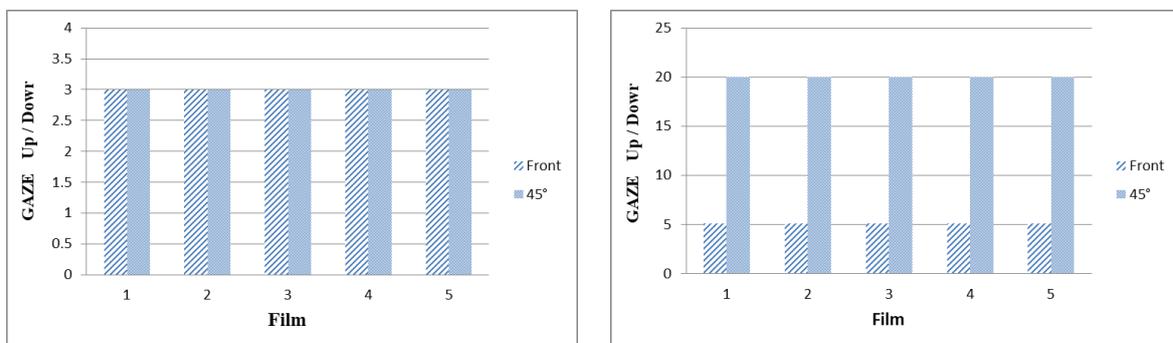


Figure 12. Freeze reaction (heights)

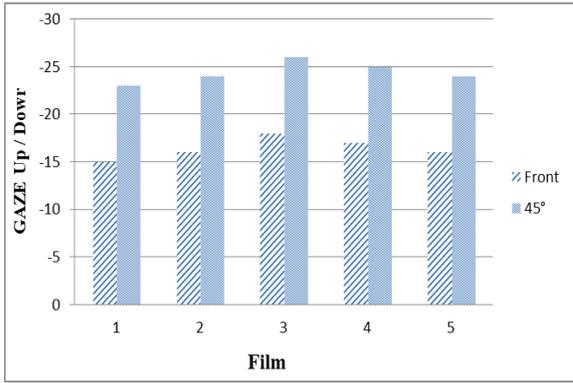


Figure 13. Territory cation (heights)

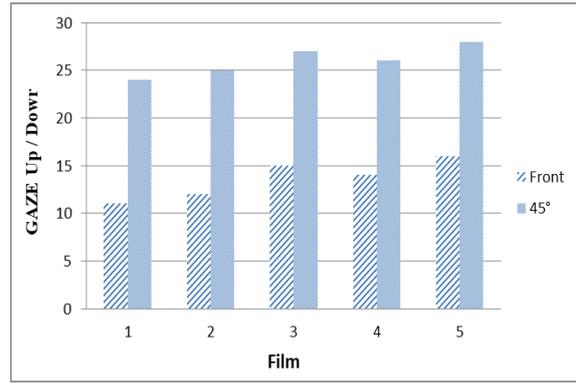


Figure 14. Look-up reaction (heights)

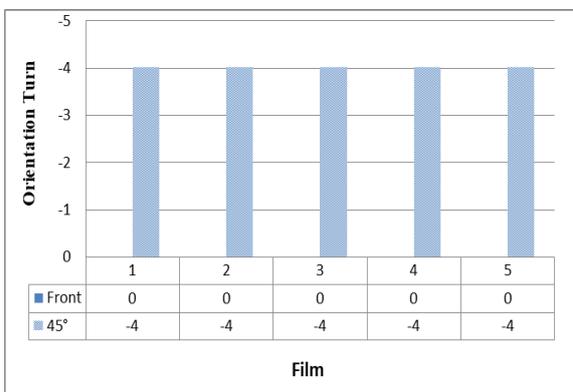
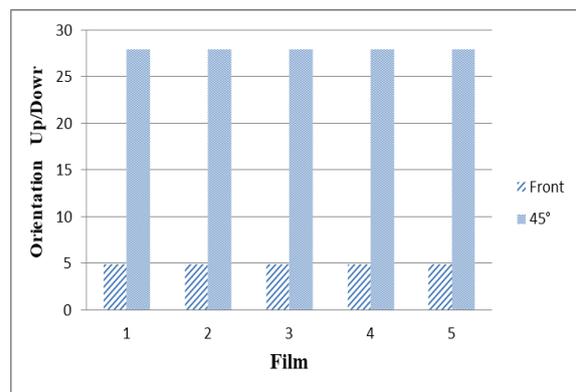


Figure 15. Combat reaction (heights)



Different distances test freeze reaction as shown in Figure 16, territory reaction as shown in Figure 17, look-up reaction as shown in Figure 18, combat reaction as shown in Figure 19, victory reaction as shown in Figure 20 and escape reaction as shown in Figure 21. The results of the first four responses show that when the distance is 300 cm, the value is displayed as 0 because sometimes it cannot be recognized, resulting in no recognition. All other states showed consistent results. Victory reaction and escape reaction use OpenSmile system identification, set the value difference between FOfinal_sma and the previous second to be between 30~140. Different resolutions test freeze reaction as shown in Figure 22, territory reaction as shown in Figure 23, look-up reaction as shown in Figure 24, combat reaction as shown in Figure 25, victory reaction as shown in Figure 20 and escape reaction in Figure 21, the results show that the two there is no significant difference in the recognition of different resolutions (480 and 600 p).

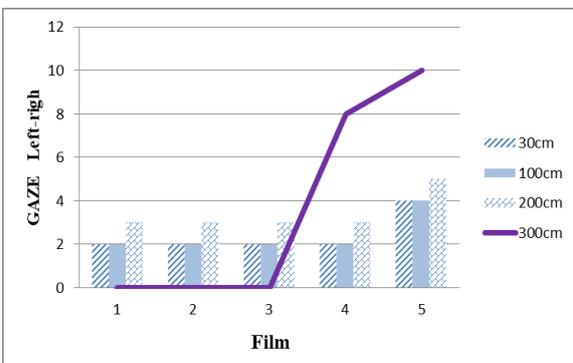
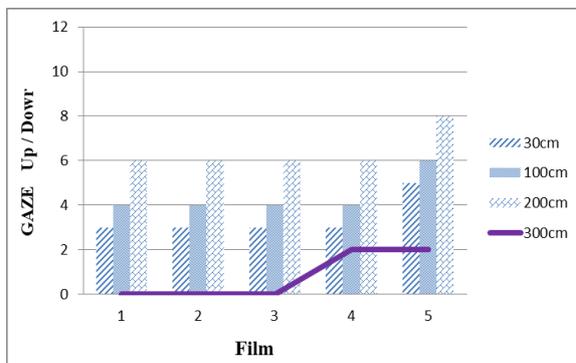


Figure 16. Freeze reaction (distances)



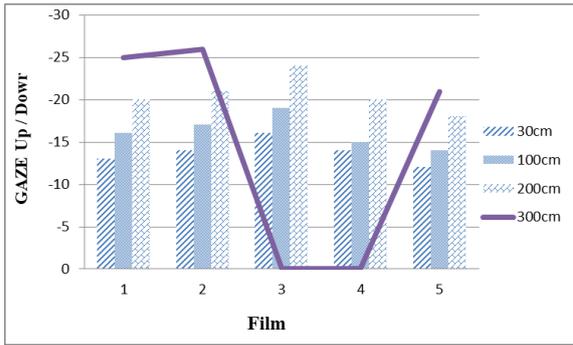


Figure 17. Territory reaction (distances)

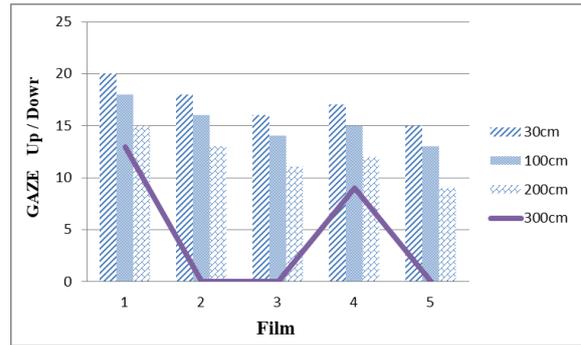


Figure 18. Look-up reaction (distances)

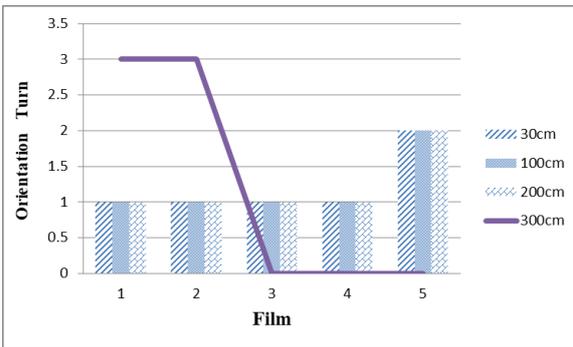


Figure 19. Combat reaction (distances)

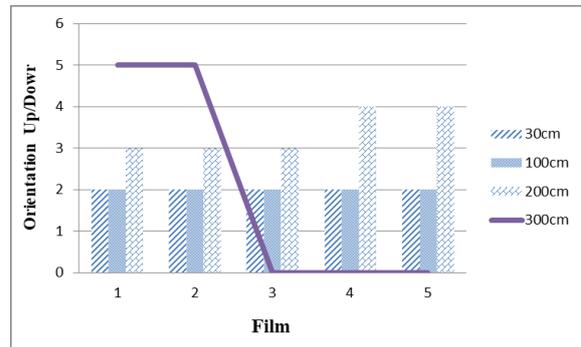


Figure 20. Victory reaction (distances)

Figure 21. Escape reaction (distances)

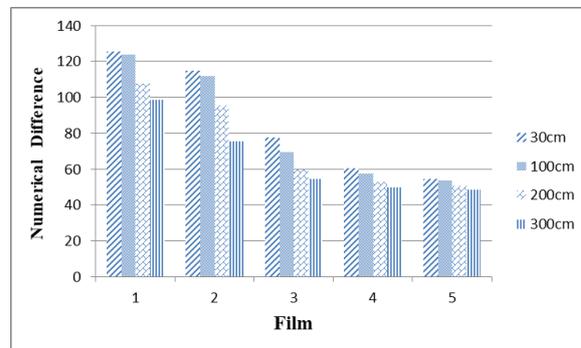
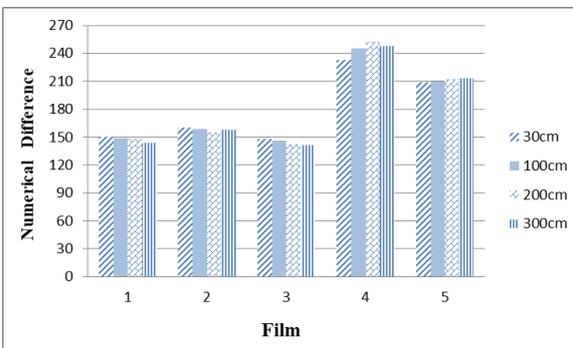


Figure 20. Victory reaction (distances)

Figure 21. Escape reaction (distances)

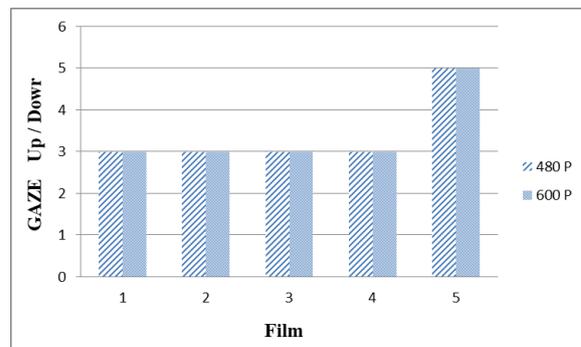
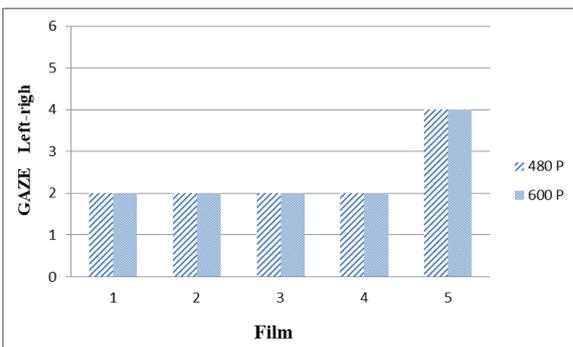


Figure 22. Freeze reaction (resolutions)

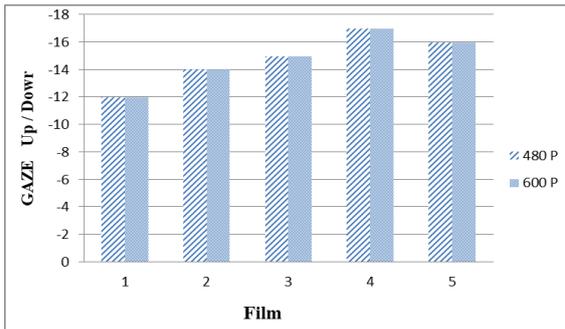


Figure 23. Territory reaction (resolutions)

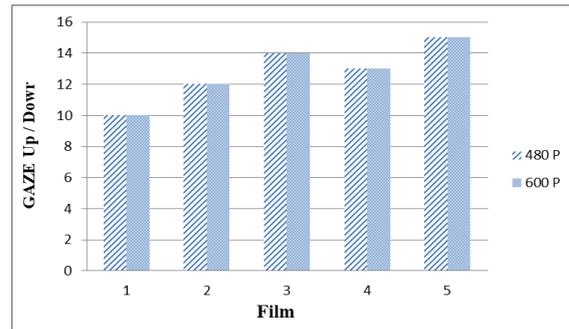


Figure 24. Look-up reaction (resolutions)

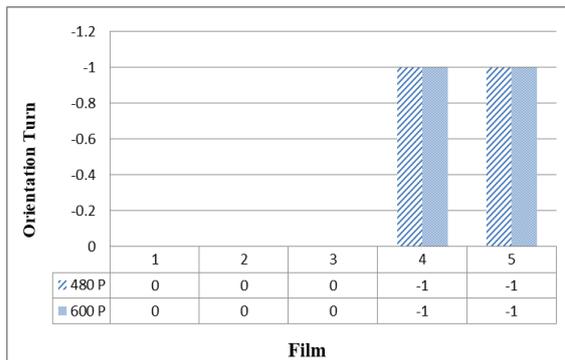


Figure 25. Combat reaction (resolutions)

4. CONCLUSION

AI is advantageous in recognizing micromovements, and when a subject is objectively captured on camera, a computer can obtain relevant data for processing. High-quality and efficient recognition can be achieved simply by using a camera and microphone. An AI system can be utilized to assist investigators in interpreting micromovements, enabling investigators to focus on the back-and-forth of questions and answers during an interrogation. Including AI in case investigations can improve the efficacy and efficiency of interrogations.

ACKNOWLEDGEMENTS

Sincere thanks to the Ministry of Justice's grants for Science and Technology Projects No. 110-1301-10-17-03 and No.111-1301-10-28-01, which enabled successful completion of the present research.

REFERENCES

- [1] I. S. Hutomo and H. Wicaksono, "A smart door prototype with a face recognition capability," *IAES International Journal of Robotics and Automation (IJRA)*, vol. 11, no. 1, pp. 1–9, Mar. 2022, doi: 10.11591/ijra.v11i1.pp1-9.
- [2] R. Thilihar C. and S. R., "Fuzzy neuro-genetic approach for feature selection and image classification in augmented reality systems," *IAES International Journal of Robotics and Automation (IJRA)*, vol. 8, no. 3, pp. 194–204, Sep. 2019, doi: 10.11591/ijra.v8i3.pp194-204.
- [3] L. Liliana, J.-H. Chae, J.-J. Lee, and B.-G. Lee, "A robust method for VR-based hand gesture recognition using density-based CNN," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 18, no. 2, Apr. 2020, doi: 10.12928/telkonnika.v18i2.14747.
- [4] S. A. Baker, H. H. Mohammed, and H. A. Aldabagh, "Improving face recognition by artificial neural network using principal component analysis," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 18, no. 6, Dec. 2020, doi: 10.12928/telkonnika.v18i6.16335.
- [5] H. A. Al-Jubouri and S. M. Mahmmod, "A comparative analysis of automatic deep neural networks for image retrieval," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 19, no. 3, Jun. 2021, doi: 10.12928/telkonnika.v19i3.18157.
- [6] F. Martínez, C. Hernández, and F. Martínez, "Evaluation of deep neural network architectures in the identification of bone fissures," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 18, no. 2, Apr. 2020, doi: 10.12928/telkonnika.v18i2.14754.

- [7] H. M. Ariza, H. H. Martínez, and L. A. Gaviria Roa, "Recognition system for facial expression by processing images with deep learning neural network," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 17, no. 6, Dec. 2019, doi: 10.12928/telkonnika.v17i6.12948.
- [8] K. A. Lipi, S. F. K. Adrita, Z. F. Tunny, A. H. Munna, and A. Kabir, "Static-gesture word recognition in Bangla sign language using convolutional neural network," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 20, no. 5, Oct. 2022, doi: 10.12928/telkonnika.v20i5.24096.
- [9] M. Attamimi, R. Mardiyanto, and A. N. Irfansyah, "Inclined image recognition for aerial mapping using deep learning and tree based models," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 16, no. 6, Dec. 2018, doi: 10.12928/telkonnika.v16i6.10157.
- [10] Z. N. Abdullah, Z. A. Abutiheen, A. A. Abdulmunem, and Z. A. Harjan, "Official logo recognition based on multilayer convolutional neural network model," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 20, no. 5, Oct. 2022, doi: 10.12928/telkonnika.v20i5.23464.
- [11] P. Kulkarni and T. M. Rajesh, "Analysis on techniques used to recognize and identifying the Human emotions," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 10, no. 3, pp. 3307–3314, Jun. 2020, doi: 10.11591/ijece.v10i3.pp3307-3314.
- [12] A. Jahagirdar and R. Phalnikar, "Comparison of feed forward and cascade forward neural networks for human action recognition," *Indonesian Journal of Electrical Engineering and Computer Science (IJECS)*, vol. 25, no. 2, pp. 892–899, Feb. 2022, doi: 10.11591/ijeecs.v25.i2.pp892-899.
- [13] M. S. Srividya, M. R. Anala, and C. Tayal, "Deep learning techniques for physical abuse detection," *IAES International Journal of Artificial Intelligence (IJ-AI)*, vol. 10, no. 4, pp. 971–981, Dec. 2021, doi: 10.11591/ijai.v10.i4.pp971-981.
- [14] H. Wibowo, F. Firdausi, W. Suharso, W. A. Kusuma, and D. Harmanto, "Facial expression recognition of 3D image using facial action coding system (FACS)," *Telecommunication Computing Electronics and Control (TELKOMNIKA)*, vol. 17, no. 2, Apr. 2019, doi: 10.12928/telkonnika.v17i2.9304.
- [15] U. Dudekula and P. N., "Linear fusion approach to convolutional neural networks for facial emotion recognition," *Indonesian Journal of Electrical Engineering and Computer Science (IJECS)*, vol. 25, no. 3, pp. 1489–1500, Mar. 2022, doi: 10.11591/ijeecs.v25.i3.pp1489-1500.
- [16] K. V. Kumar and J. Harikiran, "Privacy preserving human activity recognition framework using an optimized prediction algorithm," *IAES International Journal of Artificial Intelligence (IJ-AI)*, vol. 11, no. 1, pp. 254–264, Mar. 2022, doi: 10.11591/ijai.v11.i1.pp254-264.
- [17] R. Cerd Ng, K. Ming Lim, C. Poo Lee, and S. F. Abdul Razak, "Surveillance system with motion and face detection using histograms of oriented gradients," *Indonesian Journal of Electrical Engineering and Computer Science (IJECS)*, vol. 14, no. 2, pp. 869–876, May 2019, doi: 10.11591/ijeecs.v14.i2.pp869-876.
- [18] T. Baltrusaitis, P. Robinson, and L.-P. Morency, "OpenFace: An open source facial behavior analysis toolkit," in *2016 IEEE Winter Conference on Applications of Computer Vision (WACV)*, Mar. 2016, pp. 1–10. doi: 10.1109/WACV.2016.7477553.
- [19] J. Zhenyu, *Micro expression*. China Friendship Publishing Company, 2020.
- [20] T. Baltrusaitis, A. Zadeh, Y. C. Lim, and L.-P. Morency, "OpenFace 2.0: facial behavior analysis toolkit," in *2018 13th IEEE International Conference on Automatic Face and Gesture Recognition (FG 2018)*, May 2018, pp. 59–66. doi: 10.1109/FG.2018.00019.
- [21] E. Wood, T. Baltrusaitis, X. Zhang, Y. Sugano, P. Robinson, and A. Bulling, "Rendering of eyes for eye-shape registration and gaze estimation," in *2015 IEEE International Conference on Computer Vision (ICCV)*, Dec. 2015, pp. 3756–3764. doi: 10.1109/ICCV.2015.428.
- [22] T. Baltrusaitis, P. Robinson, and L.-P. Morency, "Constrained local neural fields for robust facial landmark detection in the wild," in *2013 IEEE International Conference on Computer Vision Workshops*, Dec. 2013, pp. 354–361. doi: 10.1109/ICCVW.2013.54.
- [23] K. Santoso and G. P. Kusuma, "Face recognition using modified OpenFace," *Procedia Computer Science*, vol. 135, pp. 510–517, 2018, doi: 10.1016/j.procs.2018.08.203.
- [24] L. Jiaying and C.-N. Lee, "Real-time face recognition system with self-learning," Master's thesis. R.O.C, National Sun Yat-sen University, 2017.
- [25] A. Zadeh, T. Baltrusaitis, and L.-P. Morency, "Convolutional experts constrained local model for facial landmark detection," in *2017 IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, Jul. 2017, pp. 2051–2059. doi: 10.1109/CVPRW.2017.256.
- [26] T. Baltrusaitis, M. Mahmoud, and P. Robinson, "Cross-dataset learning and person-specific normalisation for automatic action unit detection," in *2015 11th IEEE International Conference and Workshops on Automatic Face and Gesture Recognition (FG)*, May 2015, pp. 1–6. doi: 10.1109/FG.2015.7284869.
- [27] A. L. H. P.S and U. Eranna, "An efficient activity detection system based on skeleton joints identification," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 8, no. 6, pp. 4995–5003, Dec. 2018, doi: 10.11591/ijece.v8i6.pp4995-5003.
- [28] F. Eyben, F. Weninger, F. Gross, and B. Schuller, "Recent developments in openSMILE, the munich open-source multimedia feature extractor," in *Proceedings of the 21st ACM international conference on Multimedia*, Oct. 2013, pp. 835–838. doi: 10.1145/2502081.2502224.
- [29] J. Clucas, J. Son, M. P. Milham, and A. Klein, "Discriminating groups by audio feature analysis with openSMILE." 2018.

BIOGRAPHIES OF AUTHORS



Yi-Chang Wu     works for the Ministry of Justice Investigation Bureau. He is also a doctoral student of electronic and computer engineering at the National Taiwan University of Science and Technology. He can be contacted at shintenwu@gmail.com.



Yao-Cheng Liu     works for the Ministry of Justice Investigation Bureau. He holds a master's degree from the Department of Computer and Communication, Jinwen University of Science and Technology. He can be contacted at 40981t1371@mail.kyu.edu.tw.



Ru-Yi Huang     works for the Ministry of Justice Investigation Bureau. She obtained her bachelor's degree in tourism from Ming Chuan University. She can be contacted at a082544@gmail.com.